

ASTRI
2005

Albireo CC

Technical Specifications and Frequency Response



FB





CA



NN

Model	Albireo CC
Description	Central Channel speaker
Speaker System	2 way system
Enclosure Type	Sealed Box
Shielded Components	
Tweeter	25mm (1") Silk Dome
Midrange	
Woofer	2x130mm (5 1/4") Paper Cone
Freq. Response @ ±3dB	
on reference axis	58Hz – 22kHz
on 30° axis	58Hz – 16kHz
Crossover frequency	2.35 kHz
Slope	6 / 6 dB oct
Power handling	
on unclipped program	150 watts @ 8Ω
Recommended Amplifier	5-150 watts @ 8Ω
Sensitivity (2.83V/1m)	89 dB
Nominal Impedance	6 Ω
Minimum Impedance	4,1 Ω @ 300 Hz
Net Weight	14,8 kg
Shipping Weight	15,6 kg
Dimensions (H x W x D)	178 x 565 x 323 mm 7"x 22"1/4 x 12"3/4
Shipping Dimensions (H x W x D)	660 x 305 x 505 mm 26"x 12"x 19"7/8
Front finishes	Real Wood
Cabinet finishes	Varnished Wood
FB	Beech / Blu
CA	Cherrywood / Ivory
NN	Walnut / Black
Grille	Silver cloth
Accessories	Rubber Bumpers
Optional Stand	ST Albireo CC

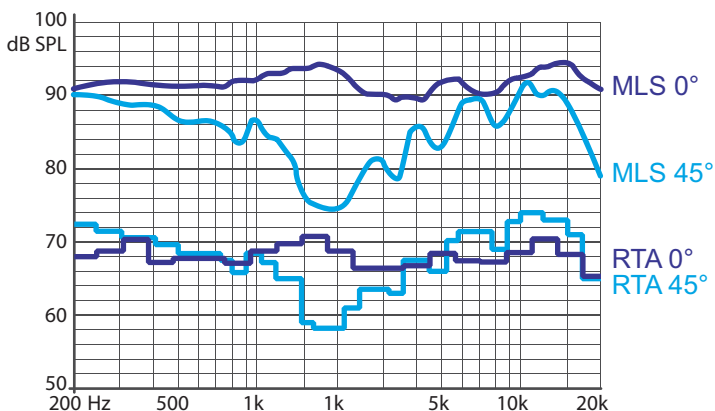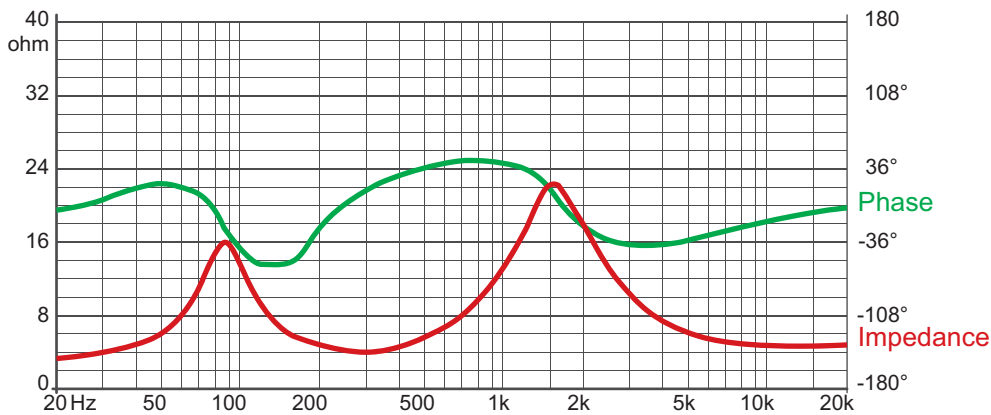

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.