

Astria
2010



C2.2 Albireo Tower

Technical Specifications and Frequency Response



SE

Model	C2.2 Albireo Tower
Description	Floorstanding speaker
Speaker System	2 way, 3 speakers
Enclosure Type	Bass Reflex, Front Vented
Shielded Components	
Tweeter	25mm (1") Silk Dome
Midrange	
Woofer	2x130mm (5 1/4") Paper Cone
Freq. Response @ ±3dB	
on reference axis	38 – 22k Hz
on 30° axis	38 – 16k Hz
Crossover frequency	2.35 kHz
Slope	6 / 6 dB oct
Power handling	
on unclipped program	200W @ 8Ω
Recommended Amplifier	35-200W @ 8Ω
Sensitivity (2.83V/1m)	90 dB
Nominal Impedance	6 Ω
Minimum Impedance	4,2 Ω @ 250 Hz
Net Weight	27,6 kg
Shipping Weight	33,1 kg
Dimensions	1170 x 255 x 455 mm
(H x W x D)	46" x 10" x 38"
Shipping Dimensions	1370 x 360 x 800 mm
(H x W x D)	54" x 14" x 31" 1/2
Finishes	SE: No Limits Emotion

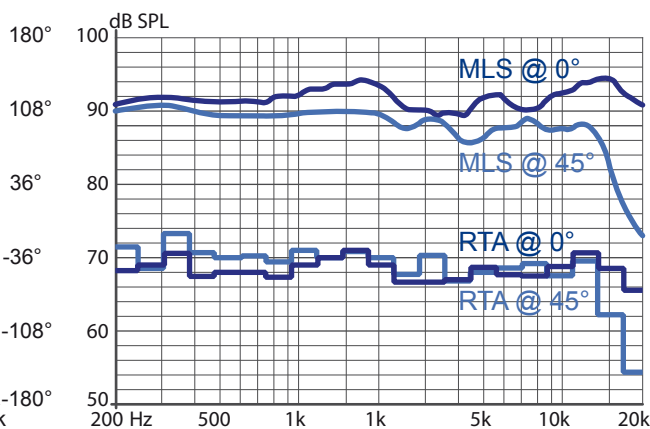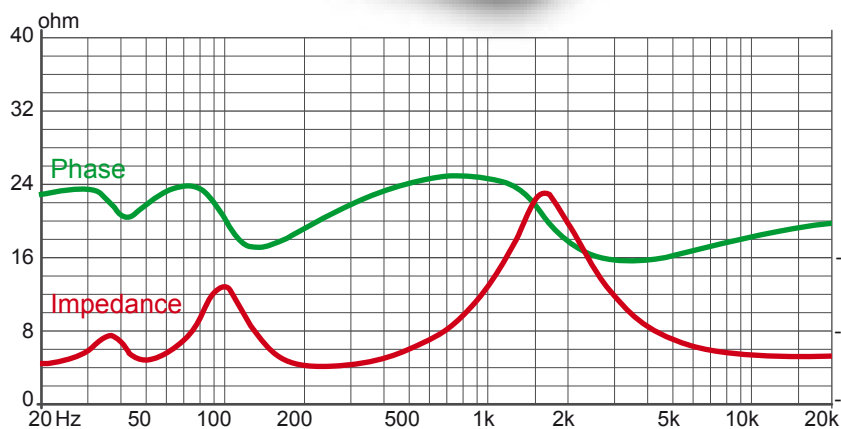

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.