

Astria
2010



C3 Schedir

Technical Specifications and Frequency Response



Best Floorstanding
Loudspeakers
C3 Schedir

Model	C3 Schedir
Description	Floorstanding speaker
Speaker System	3 way system
Enclosure Type	Bass Reflex, Rear Vented
Shielded Components	
Tweeter	26mm (1") Fabric Dome
Midrange	15cm (5") Coated Paper Cone
Woofer	2x22cm (8") Coated Paper Cone
Freq. Response @ ±3dB	
on reference axis	29 – 25k Hz
on 30° axis	29 – 17k Hz
Crossover frequency	250 - 3.5k Hz
Slope	6 / 6-6 / 6 dB oct
Power handling	
on unclipped program	300W @ 8Ω
Recommended Amplifier	25-300W @ 8Ω
Sensitivity (2.83V/1m)	93 dB
Nominal Impedance	6 Ω
Minimum Impedance	4,1 Ω @ 110 Hz
Net Weight	39,6 kg
Shipping Weight	45,1 kg
Dimensions	1250 x 178 x 500 mm
(H x W x D)	49"1/4 x 7" x 19"11/16
Shipping Dimensions	1370 x 360 x 800 mm
(H x W x D)	54" x 14"3/16 x 31"1/2
Finishes	FN: Walnut Wood and Matt Black BM: Black Mirror

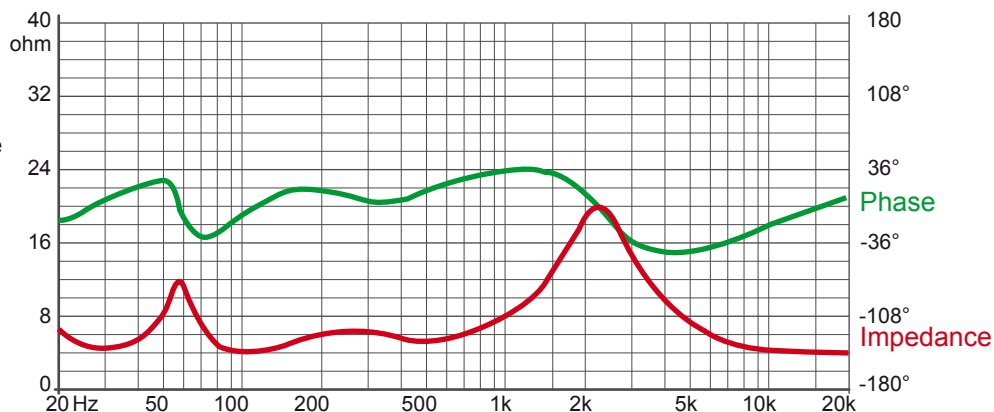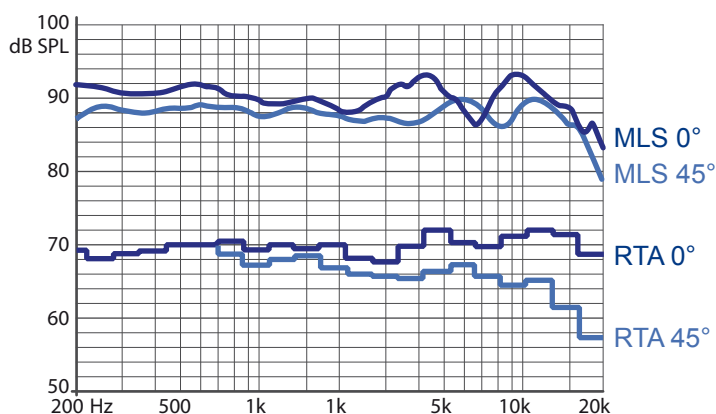

seas
equipped

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.