


Astria
2007

Sadr

Technical Specifications and Frequency Response



Model	Sadr
Description	Floorstanding speaker
Speaker System	3 way system
Enclosure Type	Bass Reflex, Rear Vented
Shielded Components	
Tweeter	26mm (1") Fabric Dome
Midrange	15cm (5") Coated Paper Cone
Woofer	22cm (8") Coated Paper Cone
Freq. Response @ ±3dB	
on reference axis	32 – 22k Hz
on 30° axis	00 – 00k Hz
Crossover frequency	350 - 3k Hz
Slope	6 / 6-6 / 6 dB oct
Power handling	
on unclipped program	300W @ 8Ω
Recommended Amplifier	25-300W @ 8Ω
Sensitivity (2.83V/1m)	92 dB
Nominal Impedance	6 Ω
Minimum Impedance	2,90 Ω @ 110 Hz
Net Weight	26,5 kg
Shipping Weight	32,0 kg
Dimensions	1200 x 178 x 380 mm
(H x W x D)	22"1/4 x 7" x 12"3/4
Shipping Dimensions	1370 x 360 x 800 mm
(H x W x D)	54"x 14"3/16 x 31"1/2
Front finishes	Real Wood
Cabinet finishes	Varnished Wood
	Black

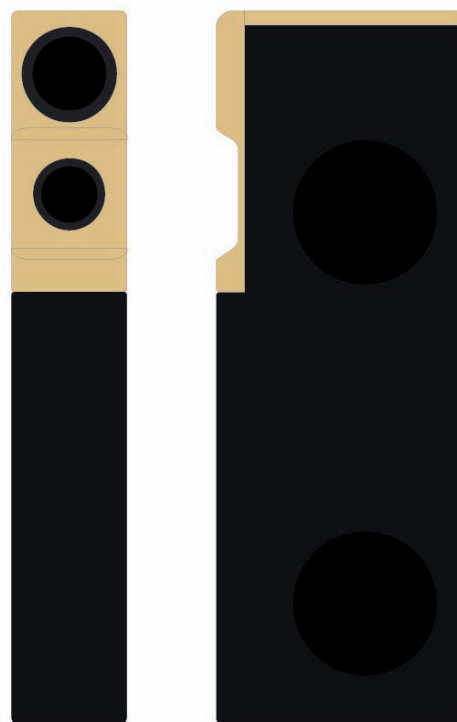

FN